

IC8

REMOTE UNDERSINK CHILLER



The thirst quenchers!™

- ✓ Lead and copper free waterways
- ✓ 1.9 litre stainless steel chilling tank
- ✓ 8 Litres/hour cooling capacity
- ✓ Stainless steel internal waterways
- ✓ Powder coated corrosion resistant cabinet
- ✓ 8 cup initial draw-off
- ✓ Dual, fan assisted static condensers
- ✓ 3 year comprehensive warranty
- ✓ Easy to install

**3 YEAR
WARRANTY**



WaterMark
ATS5200.105
WM-022458

IC8 REMOTE/UNDERSINK CHILLER


With its 8 litre per hour cooling capacity, the Waterworks™ IC8 is proof that good things come in small packages. Due to the compact design, energy efficiency and quiet operation the IC8 Under-sink chiller is the obvious choice for household applications and offices alike.

SPECIFICATIONS

CABINET: The cabinet is a corrosion resistant, high polymer polyester coated steel panel.

COLD WATER TANK: 1.7 litre fully insulated, 304 stainless steel tank. The drain plug and seal are removable for servicing.

REFRIGERATION SYSTEM: This fan assisted, static condenser system utilises R134a refrigerant which is non toxic, non-flammable and non ozone depleting. Refrigerant flow is controlled by capillary tube, which has no moving parts. The compressor is protected by an automatic overload, is lifetime lubricated and hermetically sealed.

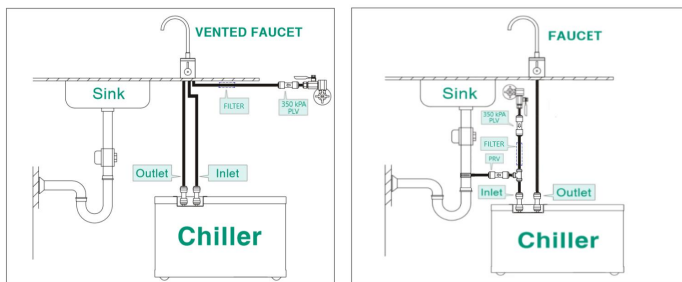

INSTALLATION

To be installed in accordance with local plumbing laws. Failure to install a certified Pressure Limiting Valve will void warranty.



Waterworks™ Australia

ABN 91 902 793 936

48-50 Neumann Road Capalaba Queensland 4157

Bulk Warehouse: 53 Neumann Road Capalaba Queensland 4157

As part of Waterworks™ Australia's policy of continuous improvement, we reserve the right to alter specifications at anytime without notice.

INSTALLATION

GENERAL: The Waterworks™ IC8 can be installed in small spaces with adequate ventilation, and can be used in conjunction with most inline filter systems. The IC8 must be professionally installed with either a vented tap or with the included kit which contains a pressure reducing valve (PRV), pressure limiting valve (PLV), shutoff valve, stainless steel connectors and a drain clamp.

PLUMBING CONNECTIONS: Both the inlet and outlet are recessed 1/4" stainless steel pipes. Quick connect stainless steel fittings are included in the above mentioned installation kit.

ELECTRICAL: Certificate number 202240. 220-240v 50hz single phase. Full load current is .8 amps. 1.5 metre power cord is supplied.

COOLING PERFORMANCE: 8 litres per hour at 8-10°C
Cooling Speed: From 27°C to 8°C in 20 minutes
Draw Off Capacity: 8 cups (150ml) below 10°C

WEIGHTS & DIMENSIONS

IC8	WEIGHT	WIDTH	DEPTH	HEIGHT
NETT	12.5kg	21cm	41cm	276cm
PACKED	14kg	23cm	46cm	30cm

WARRANTY

The Waterworks™ IC8 under sink chiller is covered by a 3 year comprehensive warranty (copy available on request). The warranty provides comprehensive parts and labour coverage for the period of 3 years from the date of original sale.



Distributed by...

Phone (07) 3390 3777

Email sales@waterworksaustralia.com

www.waterworksaustralia.com